


寸法表 OIコア



型名	寸法(mm)									定格 VA	面積比	断面積 (cm ²)	磁路長 (cm)	重量 (kg)
	A	B	I	C	D	U	V	E	F					
OI-8	18	10	54.5	39.5	32.0	6	7.3	49.8	56.7	8	1.46	1.72	13.4	0.18
OI-12	19	11	56.0	40.0	33.5	6.5	7.7	52.1	58.1	12	1.47	1.91	13.8	0.21
OI-18	21	11	62.0	45.0	36.5	7	8.3	56.7	64.5	18	1.51	2.21	15.2	0.27
OI-24	23	12	67.0	48.0	40.5	8	8.7	61.7	68.6	24	1.45	2.64	16.4	0.35
OI-32	24	13	71.0	51.0	42.5	8.5	9.2	65	72.8	32	1.42	2.99	17.4	0.42
OI-44	25	14	74.0	53.0	44.5	9	9.8	68.3	76.2	44	1.40	3.36	18.2	0.49
OI-56	27	15	79.0	56.5	47.5	9.5	10.5	73	81.3	56	1.40	3.88	19.4	0.60
OI-70	28	16	83.0	59.5	49.5	10	11.2	76.7	85.9	70	1.40	4.30	20.5	0.70
OI-88	31	17	91.0	65.5	54.5	11	12	83.7	93.9	88	1.41	5.05	22.4	0.90
OI-108	35	18	101.0	72.5	60.5	12	13	92.3	103	108	1.44	6.04	24.7	1.18
OI-132	36	20	107.0	76.5	63.5	13	14	97.6	110	132	1.40	6.91	26.2	1.45
OI-156	38	21	109.0	77.5	64.5	13.5	14.8	100	112	156	1.41	7.66	26.7	1.63
OI-200	40	24	102.0	63.0	72.0	14	18	113	105	200	1.50	9.21	25.5	1.96
OI-250	45	26	108.0	67.0	81.0	16	19	124	111	250	1.46	11.20	27.6	2.57
OI-320	50	29	114.0	68.0	88.0	17	21	135	117	320	1.45	13.90	29.1	3.26
OI-400	53	31	119.0	70.0	95.0	19	22	145	122	400	1.42	15.80	30.6	3.95
OI-500	57	34	126.0	73.0	101.0	20	24	155	129	500	1.41	18.60	32.4	4.86
OI-630	63	37	132.0	75.0	111.0	22	27	169	134	630	1.46	22.40	34.7	6.40
OI-800	68	40	140.0	79.0	120.0	24	29	182	142	800	1.45	26.10	37.1	7.99
OI-1000	73	42	148.0	84.0	129.0	26	30	193	150	###	1.43	29.40	39.4	9.50

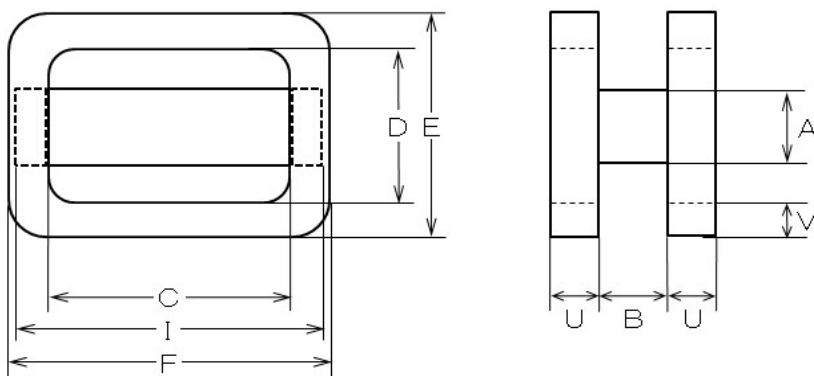

ナノ結晶・アモルファス・高珪素・電磁鋼板
カットコア トロイダルコア OIコア ギャップコア

大阪市北区曾根崎新地 2-1-4-1004

TEL : 06-6347-9005 FAX : 06-6347-9015

©2023- Kuretake Electro-Steel Co., Ltd.